

Lovibond® Scuba Evolution

Scuba II



5 measuring methods

uniform backlit display

no data transfer

small display,
less information

3 buttons
without icons



ergonomic design
with rounded back

battery compartment
with click push lock

Scuba3s




all important
measuring methods
for the pool

coloured
backlit display

new keypad with
4 buttons
& icons

NFC data transfer
via smartphone/tablet
to the Lovibond® PoolAssistant App

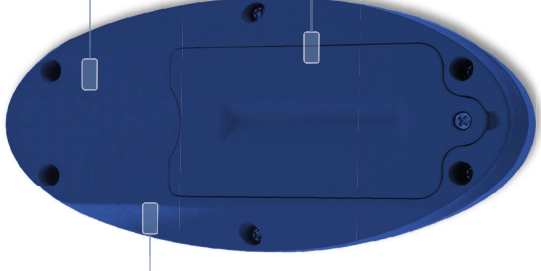

flat footprint:
test without wobbling

waterproof,
screwed battery compartment

Technical data		Scuba II	Scuba3s
Optics		Temperature compensated LED & photosensor amplifier	LED (white light), optical multichannel sensor with diffuser
Conformity		CE	CE, UKCA
Wavelength range		530 nm	Multi wavelength
Display		LCD segmented, backlight monochrome, 33 x 25 mm	LCD dot matrix with backlight (red, white, green), 35 x 25 mm
Data interface		–	NFC (Near Field Communication)
App connectivity		–	✓
Data logger		–	100 data sets
Power supply		2 AAA batteries (LR03), battery life: approx. 90 measurements	2 x AA batteries (Mignon AA/LR6), battery life: 5000 measurements
Auto-Off		5 minutes after last key press	5 minutes
Environmental conditions		5–40 °C	5–50 °C
Waterproof		✓	✓
Methods		Chlorine, Bromine, pH value, Alkalinity, Cyanuric acid	Chlorine (total, free, combined), Bromine, pH value, Alkalinity -m, Calcium hardness, Cyanuric acid, Copper, Phosphate, Urea
Keypad		3 buttons for various functions	4 buttons for various functions