

TEHNIČKE SPECIFIKACIJE




MODEL		25 Ø 360	40l Ø 360	50l Ø 360	80l Ø 360	100l Ø 360
Zapremina	litar	23.5	31	47.5	73.5	98
Ispitni pritisak	bar			12		
Maks. radni pritisak	bar			8		
Ekspandirana poliuretanska izolacija	mm			20		
Težina praznog bafera	kg	10	12	16	17	20
Maks. radna temperatura	°C			95		




25-40-50L
2 ULAZA & 2 IZLAZA






80-100L
4 ULAZA & 4 IZLAZA




SEKCIJA A-A


25-40-50L | 4-CEVI Dimenzija (mm)

TIP	A	Q1	Q2	HT
25 L	140	150	278	435
40 L	240	150	378	535
50 L	450	158	578	745

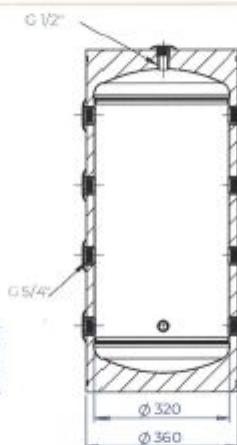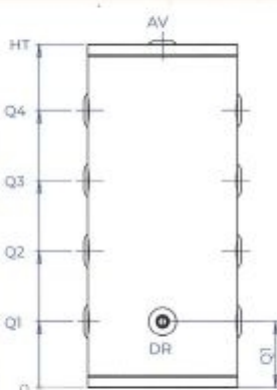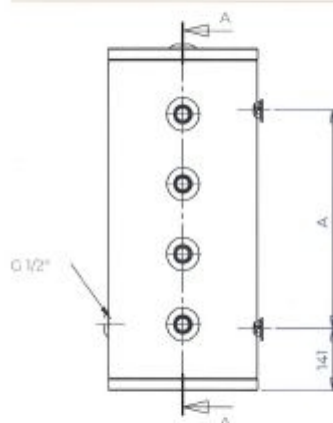

SEKCIJA A-A


80-100L | 8-CEVI Dimenzija (mm)

TIP	A	Q1	Q2	Q3	Q4	HT
80 L	780	163	416	669	923	1085
100 L	1080	163	519	876	1233	1395